




## AQUAGYP™ (Super Fine Gypsum Plaster)

**AquaGyp** is manufactured from selected Gypsum Beta Hemihydrates. It has high grade bonding ingredients. It is a very good, fine and white material. It has high strength with better adhesiveness and durability

**WHERE TO USE:** AquaGyp is used for walls made of AAC blocks, RCC and other types of blocks/bricks.

### HOW TO USE:

1. Pre-wet the wall surface before application
2. Mix 1.5 parts of powder in 1 part of water.
3. Place a bull mark and by using a plumb, ensure vertical level and make marks at every 4 feet.
4. Place an aluminium box plate on wall. Fill the gap with AquaGyp
5. Apply the AquaGyp material paste on the wall with the help of a trowel / patra
6. Level the material paste on the wall with help of aluminium box plate
7. Mix thin slurry and apply it on the leveled surface with a trowel to get a smooth finish.
8. After application leave the wall to dry for 2 to 3 days

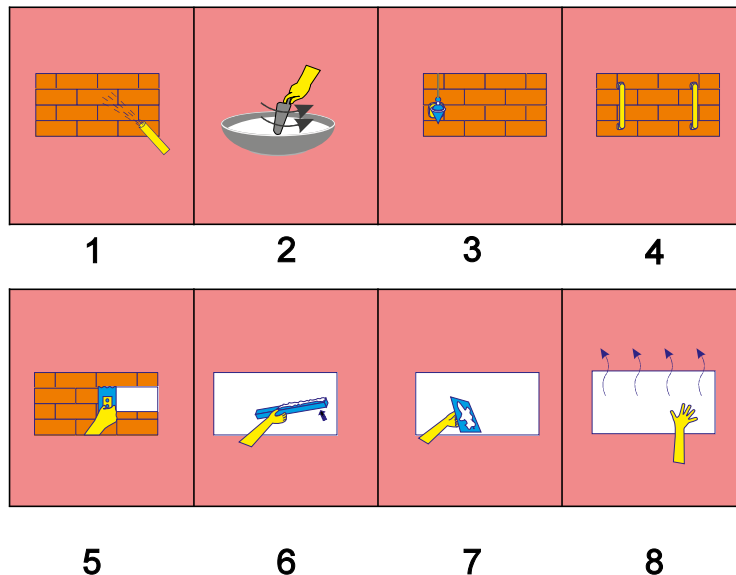

**ADVANTAGES:**

- Better coverage.
- Superior strength.
- Pure white in color.
- Smooth & crack free finish.
- No water curing required.
- Fire & Thermal resistant

**COVERAGE:**

A 20 kg bag covers approximately:  
30-35 sq.ft. for a coating of 5mm thickness

**STORAGE:** Store unopened in normal & dry condition.

**PRECAUTION:** Before mixing, ensure to always first mix powder to water and not vice versa. Mix the material thoroughly and make certain that it is free from impurities and lumps before use.

<b>SHELF LIFE:</b>	<b>PACKAGING:</b>
12 months from the date of manufacture.	1 & 5 kg pouch, 20 kg bag.

**Corporate Office:**

601, Corporate Arena, Off. Aarey Piralal Cross Rd., Goregaon (W), Mumbai - 400104  
Tel: 022-46038393 Email: [info@aquaproofindia.com](mailto:info@aquaproofindia.com) | Website: [www.aquaproofindia.com](http://www.aquaproofindia.com)